PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:

G06F 9/445

A1

(11) International Publication Number: WO 99/49392

(43) International Publication Date: 30 September 1999 (30.09.99)

(21) International Application Number:

PCT/IB98/01799

(22) International Filing Date:

12 November 1998 (12.11.98)

(30) Priority Data:

98105179.0

23 March 1998 (23.03.98)

EP

(71) Applicant (for all designated States except US): INTER-NATIONAL BUSINESS MACHINES CORPORATION [US/US]; New Orchard Road, Armonk, NY 10504 (US).

(72) Inventors; and


- (75) Inventors/Applicants (for US only): BAENTSCH, Michael [DE/CH]; Wildenbuehlstrasse 18, CH-8135 Langnau (CH). BUHLER, Peter [DE/CH]; Ludretikonerstrasse 18, CH-8800 Thalwil (CH). OESTREICHER, Marcus [DE/CH]; Neptunstrasse 21, CH-8032 Zurich (CH).
- (74) Agent: KLETT, Peter, Michael; International Business Machines Corporation, Säumerstrasse 4, CH-8803 Rüschlikon (CH).

(81) Designated States: BR, CA, CN, CZ, HU, JP, KR, PL, RU, SG, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

With international search report.

(54) Title: JAVA RUNTIME SYSTEM WITH MODIFIED CONSTANT POOL

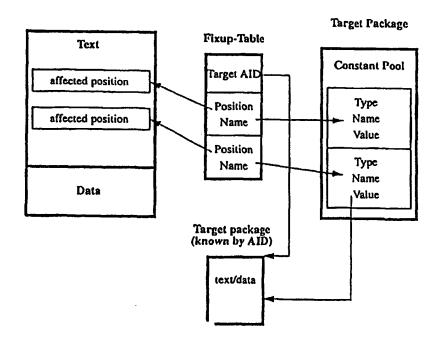

(57) Abstract

A Java runtime system is proposed which comprises a stack-based interpreter executing a program that comprises bytecodes and class structures. The system further comprises a modified constant pool with internal information of use only during linking and with external information to be preserved for late code binding. The internal information is removed from the modified constant pool after linking.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
ΑU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
ΑZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	(E	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	Li	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

DESCRIPTION

JAVA RUNTIME SYSTEM WITH MODIFIED CONSTANT POOL

5

FIELD OF THE INVENTION

The present invention concerns dynamic code down load and linking in resource constraint Java runtime environments, such as in JavaCards for example.

10

15

BACKGROUND AND PRIOR ART

In a conventional Java system, references to class structures (internal and external) are resolved using indirect name lookup via a so-called constant pool. Such an approach can only be used in a system providing sufficient resources in terms of processing power and internal resources.

In a resource constraint runtime system (e.g. a JavaCard) this approach is not promising. Instead, one might use resolved references to class structures, such that indirections are obviated and maintaining the constant pool can be avoided.

20

The resolving of the references (linking) is subject of the present invention.

It is an object of the present invention to achieve efficient linking in resource constraint Java runtime environments.

25

It is an object of the present invention to achieve space and runtime efficient linking in resource constraint Java runtime environments.

BRIEF DESCRIPTION OF THE DRAWINGS

- Fig. 1 illustrates the linking with the JavaSoft proposed cap file format.
- Fig. 2 illustrates the linking by offset with the herein proposed file format.
- 5 Fig. 3 illustrates the linking by name with the herein proposed file format.

DETAILED DESCRIPTION

- In the following, a general overview of the present invention will be given and implementation aspects will be addressed. Java is a programming language and environment developed by Sun Microsystems, Inc. 2550 Garcia Ave., Mountain View, CA 94043-1100, USA; the term "Java" is a trademark of this company.
- Since the present description also deals with details of the implementation, the person skilled in the art is assumed to be familiar with the basic mechanisms of the Java Virtual machine and its implementation. A comprehensive presentation of the Java language and its implementation of the JVM was disclosed by J. Goslin, B. Joy, and G. Tele in "The Java Language Specification" and T. Lindholm and F. Yellin in "The Java Virtual machine Specification", both by Addison-Wesley Publishing Co., 1996. Please note however, that the Java-Card Virtual machine, herein referred to as Java-Card VM, is different in several aspects since only a subset and additional bytecodes are used.

1.0 JavaSoft CAP file format proposal

25

The CAP file format, as proposed by JavaSoft, divides a cap file into several sections. A cap file basically contains a text and a data section. The text section contains the class structures, method structures and the bytecode instructions. The data section contains the static fields of the cardlet.

30

The text section references all symbols (classes, methods etc.) whose actual addresses are not known before link time via an offset into the constant pool. For every such symbol the

constant pool contains the AID for the target package and the offset of that symbol in that target package (i.e. the package being linked against). The constant pool provides these offsets for all imported symbols (the symbols defined in other packages) and for all exported symbols (the symbols defined and accessed within the cardlet being loaded).

5

10

15

20

25

30

The organization of the text section, data section and constant pool provides sufficient information for executing a cardlet. After loading a cardlet, the linker could step through the constant pool and replace the offsets of the symbols into their target packages with their real addresses. The linker merely has to look up the specific package by the given AID, add its start address to the symbol offset and store this information back into the constant pool. The Java-Card VM then can use these addresses in the constant pool for the interpretation. However, the constant pool itself is not needed at runtime. In fact, it would require one additionally unnecessary indirection to find the address of a symbol during the interpretation. Moreover, the constant pool takes up space on the card unnecessarily. The JavaSoft cap file format therefore uses fixup tables for the individual sections to remove the requirement for the constant pool after linking. The fixup table contains all the positions in the text section where a relocation has to take place. The linker walks through the fixup table and takes the offset at that position into the constant pool. Then it resolves the address of that symbol and stores it at the original position in the text section. The interpreter can then directly use these addresses at runtime and therefore the constant pool can be removed after the linking process. The only sections remaining on the card after the link process are the text and data sections.

The linking of cardlets with precalculated and hardcoded offsets into target packages allows a compact system. However, it does not provide enough flexibility for allowing different implementations of system classes and specified extensions on different cards. For example, a cardlet which was converted against the system classes of IBM and an extension of JavaSoft is unlikely to run on a card with the system cardlet from JavaSoft and the extension cardlet coming from IBM. The primary reason for this is that the offsets of individual classes, methods and the field offsets of instances will differ from implementation to implementation.

The following invention extends upon the ideas of the current JavaSoft proposal and enhances it by an additional lightweight and flexible symbolic linking mechanism.

2.0 Inventive CAP file format

5

10

15

20

25

30

The cap file format according to the present invention also divides the cap file into different sections. The text section contains the class structures, method structures and bytecode instructions, the data section again the static fields. The cap file also maintains the necessary relocation information in fixup tables. There is one fixup table for every package the cardlet is linked to (i.e. the target package).

The fixup table again contains the position in the text or data section where a relocation has to take place. In the simple case, these places are also relocated by a precalculated offset into trusted and well known target packages. In this case, the linker will look up the start address of the package with the given Target AID, add the offset into the target package and store that value at the original position in the text section. The offset into the target package can be kept either in the fixup table or in the text section at the relocation address to keep the fixup table smaller. The relocation by offset can always be used for most of the references within the loaded cardlet itself. The converter is permitted to precalculate these offsets without breaking compatibility.

For system integrity reasons, references to other external packages should not be linked by precalculated offsets. Instead, a name or identifier should be used for references to other packages during the link process. These names and their associated values must only be stored on the card for packages which are shared between multiple applets. As these tables of name/value pairs should be as small as possible, this cap file format restricts the naming of class file elements, but still provides the possibility of vendor specific implementations of different specifications:

- public classes: must be named and exportable.
 - public static methods and constructors: ditto

5

10

15

25

public static fields: ditto

virtual methods:

The interpreter finds a virtual method via an index into the virtual method table. These indices and the virtual method table would need to be resolved on the card if the JavaCard environment wants to support the standard Java late code binding of virtual methods. During the method table construction the linker has to decide if a method inherits another method in the method table. As these methods could be defined in different cardlets, a global naming scheme for methods must be introduced in order to decide whether two methods have the same type. As the late code binding of virtual method calls requires a global naming scheme and additional resources on the card for resolving and naming virtual methods, the inventive cap file format does not support it. But even with this limitation, sufficient room for vendor specific implementations of core packages and extensions remains. The programmer can freely add private or static methods and classes. He can also add non private instance methods if they are not inherited and declared as final. The converter can then replace calls to these methods with direct invocations.

instance fields:

The number and types of instance fields in a class are not usually defined by specifications and will vary between the implementations of different vendors. Therefore the binding of field offsets must be addressed by a the CAP file format proposal. The usage of fields regarding the link process can be separated into the following three categories:

- precalculated field offsets
- A get-/put-field instruction references a field whose class and all superclasses are defined in the containing cardlet. The offset of this field can then be precalculated by the converter and need not be linked during the load process. If there is an agreement that the Object class does not contain any field declarations a lot of field accesses will fall under this category.
- access to fields of cardlet-internal classes with any cardlet-external superclass(es)

 This case must be supported by a cap file format to allow the subclassing of classes defined in separate packages. The converter can calculate the offset of the field

relative to the instance size of the cardlet-external superclass and store this value in the cap file. During the link process the actual offset of the field has to be recomputed based on the size of the base class. The same can be done for the instance size element of the cardlet internal class.

access to fields in cardlet-external superclasses or in any external class. Although instance fields are rarely declared as public, they are often declared as protected. The access to protected fields could always be granted by specifying protected set-/-get-field methods, but the proposed cap file format also allows a direct access to such protected or public declared fields. A package which exports a protected or public instance field must contain a name and the offset for such a field to allow for symbolic linking.

A package which exports classes, methods or fields contains a constant pool whose entries contain the type (class etc.), the name and the value for that symbol. As the cap file format does not need to support a global naming scheme, the names for the associated symbols can be easily specified. The symbols can be numbered from 0 to n and can be handed out together with a specification of the application programming interface (API). The implementor of such a specification is still able to export additional classes etc. by choosing new names beginning from n+1.

20

25

5

10

15

Figure 3 shows the symbolic binding of an applet against a target package. The entries in the fixup table contain the type of the relocation (see below), an offset into the text section where to relocate to, and the name of the symbol (which for space-efficiency might also be stored at the position to relocate). With the proposed naming scheme the name can be used as an index into the constant pool of the target package. The entries in the constant pool contain the type of the entry, the name and the associated value. The linker relocates the entries in the fixup table depending on the type of the entry:

• A method has to be relocated:

The constant pool item of the target package with the given name must be a method type. The value must be an offset into the target package where the method is defined. The linker calculates the address of the method and fixes the text section at the given offset.

- A class has to be relocated:
 same as above, except that the constant pool item with the symbol index and name must
 be a class type.
- A static field has to be relocated:
- same as above, except that the constant pool item with the symbol index and name must be a static field type, the value is an offset into the data section of the package.
 - A relative instance field offset or a relative class instance size value must be relocated:
 The constant pool item of the target package with the given name must be a class type.
 The linker calculates the address of the target class and gets the instance size of the class (the latter is an element of the class structure). The linker adds the instance size to the value given at the text section offset and replaces the latter with the sum.
 - An absolute field access to an undefined class:
 The constant pool item of the target package with the given name must be an instance field type. The value of that item is the absolute offset of that field in an instance of its class.

If the loaded cardlet is a shared package and exports protected or public fields the linker relocates their entries in the constant pool, too. Their real offsets are relocated in the same manner as relative instance field offsets.

20

25

10

15

The fixup tables can be removed once the link process is finished. Applets do not need a constant pool, only packages which can be shared between multiple applets need the constant pool for future usage. The size of the constant pool depends on the number of exported items and on the size of an item. A constant pool for the current JavaCard system classes takes currently about 160 items. A constant pool item contains a type field, a name and a value which can be stored in 4 bytes (with the proposed naming scheme this could even be reduced to three bytes). This results in a constant pool size of 720 bytes for all system classes.

Differences to the JavaSoft proposal:

- The JavaSoft constant pool currently does not differentiate between internally defined and externally defined items. This makes it difficult to remove the constant pool items covering internally defined items.
- The field offsets in the get-/put-field instructions and the instance size field in the class structure are only 8bit wide. This makes it currently impossible to use this values as indices into the constant pool where information could be stored to bind the offset of a field during the link process.

10

5

Due to these two limitations, the current JavaSoft proposal needs enhancements to make a necessary lightweight naming scheme - like the one herein proposed - possible.

3.0 Appendix

15

20

3.1 Minor Extensions

In some environments there might be no need or no space for any symbolic information on the card at all, e.g. it might be sufficient to use only precalculated offsets during the link process. The cap file format according to the present invention can be extended in a safe manner in this direction:

- manior in this direction.
- A package or applet does not only contain a version number but also a vendor id (or implementation id).
- The entries in the fixup tables which reference constant pool items also contain the offsets which the converter could calculate during conversion time
- At the beginning of the download process the loader checks if the packages which are required by the applet are from the same vendor (e.g. the same implementation) as the ones currently installed on the card. If this is true, the loader uses the offsets in the applet cap file during the link process. Otherwise the download process fails.
 - 3.2 Specifications for referred cap file format items
- The purpose of the detailed description is not to strictly specify the contents of a cap file.

 Instead it provides a detailed discussion in what should and what must be in the cap file starting with the proposal of JavaSoft. Nevertheless, we are also providing more formal

specifications of the cap file format items mentioned in this description in C-like declarations. These are specified here for clarity and in non optimized form:

```
// the format of a fixup table
      typedef struct _fixup_table{
5
       ul target_aid_cnt;
       ul target_aid[];
       ul entries_cnt;
       fixup_entry_t entries[];
10
      };
      // the layout of a fixup entry
      typedef struct _fixup_entry{
15
       ul type;
                       // the offset into the text or data
       u2 offset:
        union{
         u2 target_offset; // offset into target package
         u2 symbol_name; // name and index into target constant pool
20
        } value;
       } fixup_entry_t;
       // the individual fixup entry types
       // relocate a 16bit address in the text or data section by offset,
25
       // this can cover the addresse of classes, methods etc.
       #define RELO_TEXT_16BIT_WITH_OFFSET
       #define RELO_TEXT_16BIT_WITH_OFFSET
       // relocate the value of a symbol into the text section
       #define RELO_CLASS_BY_SYM
30
       #define RELO_METHOD_BY_SYM
       #define RELO_STATICFIELD_BY_SYM
```

```
#define RELO_INSTANCEFIELD_BY_SYM
```

```
// the layout of the constant pool
      typedef struct _constant_pool{
 5
       u2 cnt;
       cp_item_t items[cnt];
      };
      // the layout of a constant pool item
10
      typedef struct _cp_item{
       unsigned type:4
                           // the type of the item
       unsigned name:12;
                             // the name if needed at all
       u2 offset;
                         // the offset
      };
15
      // the constant pool item types
      #define CONSTPOOL_CLASS
      #define CONSTPOOL_METHOD
      #define CONSTPOOL_STATICFIELD
20
      #define CONSTPOOL_INSTANCEFIELD
```

CLAIMS

- Java runtime system comprising a stack based interpreter executing a program comprising bytecodes and class structures, said system further comprising a modified constant pool with internal information of use only during linking and with external information to be preserved for late code binding, wherein said internal information is removed from said modified constant pool after linking.
- 10 2. The Java runtime system of claim 1 being a JavaCard.
 - Method for introducing new code into a Java runtime system which comprises a stack based interpreter for the execution of a package comprising bytecodes and class structures,
- linking (internal linking) said new code to said package existing in said system,
 whereby the offset of said new code with respect to itself is substituted by a reference known only at link time,
 - whereby external links are resolved using symbolic information (names) contained in a constant pool of said package,
 - removing at least the information from said constant pool which was used for substitution by said references known only at link time.
 - 4. The method of claim 3, wherein also information used for linking to external packages is removed from said constant pool.
 - 5. The method of claim 3, wherein the remaining information in said constant pool allows other packages and applets, which are down loaded later, to properly access said new code (late code binding).
- 30 6. The method of claim 3, wherein said Java runtime system is a JavaCard.

20

25

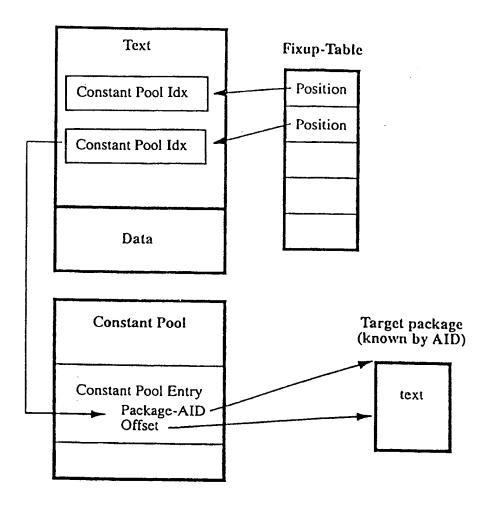


Fig. 1

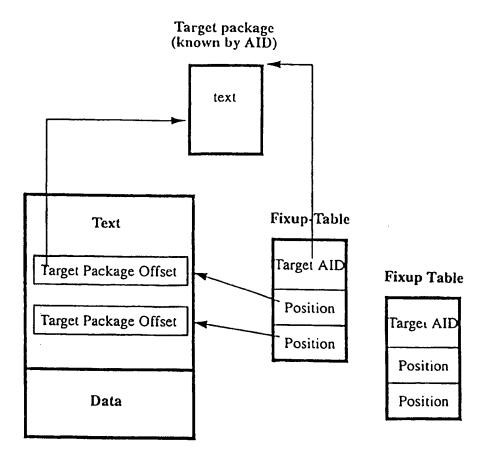


Fig. 2

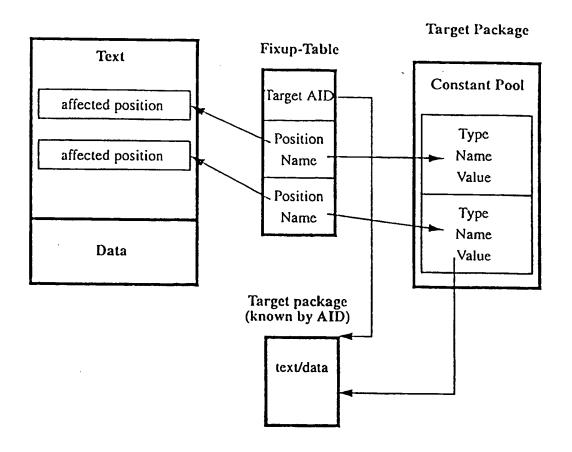


Fig. 3

INTERNATIONAL SEARCH REPORT

Int tional Application No PCT/IB 98/01799

		PCT/IB 98/01799		
	FICATION OF SUBJECT MATTER G06F9/445			
According to	International Patent Classification (IPC) or to both national classification	tion and IPC		
	SEARCHED			
IPC 6	cumentation searched (classification system followed by classifications $G06F$	n symbols)		
Documentat	ion searched other than minimum documentation to the extent that s	uch documents are included in the fields searched		
Electronic d	ata base consulted during the international search (name of data ba	se and, where practical, search terms used)		
C. DOCUM	ENTS CONSIDERED TO BE RELEVANT			
Category °	Citation of document, with indication, where appropriate, of the rel	evant passages Reje	vant to claim No.	
X	US 5 581 768 A (GARNEY JOHN ET / 3 December 1996	1 1		
/ A	see column 3, line 5 - line 22 see column 9, line 38 - column 10 figures 6A-G		i	
	see column 14, line 46 - column 1 27; figures 12A-C,13A,B	6, line		
A	EP 0 810 522 A (SUN MICROSYSTEMS 3 December 1997 see column 5, line 55 - column 7 see column 9, line 15 - line 39 see claim 1			
A	US 5 291 601 A (SANDS SAMUEL C) 1 March 1994 see abstract see column 2, line 38 - column 3	1,3	3,5	
<u> </u>		-/		
X Fun	ther documents are listed in the continuation of box C.	χ Patent family members are listed in annex.		
"A" docum "E" earlier filing "L" docum which citatic "O" docum other "P" docum later	ent which may throw doubts on priority claim(s) or its cited to establish the publication date of another on or other special reason (as specified) nent referring to an oral disclosure, use, exhibition or means lent published prior to the international filling date but than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family Date of mailing of the international search report		
	actual completion of the international search March 1999			
Name and	mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2	Authorized officer		
	NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo ni, Fax: (+31-70) 340-3016	Bijn, K		

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Int :ional Application No PCT/IB 98/01799

C./Continu	ation) DOCUMENTS CONSIDERED TO BE RELEVANT	/IB 98/01799
Category °	Citation of document, with indication, where appropriate, of the relevant passages	
	appropriate, or the leavels passages	Relevant to claim No.
Α .	"C INTER-LINKAGE FUNCTION INVOCATION METHOD" IBM TECHNICAL DISCLOSURE BULLETIN, vol. 35, no. 4B, 1 September 1992, pages 44-49, XP000313847 see the whole document	1,3,4
A	SUN MICROSYSTEMS, INC.: "Java Card 2.0 Language Subset and Virtual Machine Specification" REVISION 1.0 FINAL,13 October 1997, pages 2-14, XP002095345 retrieved from the Internet at ftp.javasoft.com/docs/javacard/jc20-langua ge.pdf on 03/03/1999 see page 3, line 1 - page 4, line 10	2,6

3

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. .donal Application No PCT/IB 98/01799

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5581768	Α	03-12-1996	AU DE GB WO	4986096 A 19681256 T 2314182 A 9627158 A	18-09-1996 12-02-1998 17-12-1997 06-09-1996
EP 0810522	Α	03-12-1997	US CN JP	5815718 A 1172303 A 10198570 A	29-09-1998 04-02-1998 31-07-1998
US 5291601	Α	01-03-1994	NON		

Form PCT/ISA/210 (patent family annex) (July 1992)

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

□ BLACK BORDERS
□ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
□ FADED TEXT OR DRAWING
□ BLURRED OR ILLEGIBLE TEXT OR DRAWING
□ SKEWED/SLANTED IMAGES
□ COLOR OR BLACK AND WHITE PHOTOGRAPHS
□ GRAY SCALE DOCUMENTS
□ LINES OR MARKS ON ORIGINAL DOCUMENT
□ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

IMAGES ARE BEST AVAILABLE COPY.

OTHER:

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.